




COLLECTION • FICTION

FICTION


135630505-00xxx



00130




00239




00300






00303



00471



00479



Répond à la démarche

HQE LEED

SITE
CERTIFIÉ



EMISSION CLASS FOR BUILDING MATERIAL



0679-CPR-0196
07
EN 14041 : 2004

ΔLw 24 dB

$\alpha_w = 0,15$ (H)

Bfl-s1 / Bfl-s1

Classification 33 / Classification 33

Envers vnyil 100 % recyclés / 100 % recycled vnyil backing

Stabilité dimensionnelle / Dimensional stability

Produit teinté dans la masse / Solution dyed product

100 % Polyamide / 100 % Polyamide

FICTION

SPÉCIFICATION

Composition fibreuse 100% Polyamide
(Teint masse)
Jauge 5/64 loop pile
Densité 213 200 Stitches/m²
Poids de fil 750 g/m²
Masse de velours utile 370 g/m²
Epaisseur velours utile 2.9 mm
Densité du velours de surface 0,128 g/cm³
Masse totale 4419 g/m²
Epaisseur totale 6.8 mm
Premier dossier Non tissé
Envers Matière 100% recyclé
Dimensions 50x50cm
Dalles par boîte 20 = 5m²

PERFORMANCES TECHNIQUES

Stabilité dimensionnelle ≤ 0,10%
Comportement au feu Bfls1
Bruits de choc ΔL (w) 24 dB
Absorption acoustique α_w = 0,15 (H)
Résistance électrique ≤ 2,0kV RT ~ 10¹⁰Ω
Résistance thermique 0,09 m² K/W
Solidité à la lumière 7/8
Aptitude chaise à roulette R≥2,4
Classement européen 33

SENS DE POSE



SPECIFICATION

Pile fiber 100% Polyamide
(Solution dyed)
Gauge 5/64 loop pile
Tuft density 178 235 Stitches/sqy²
Total pile mass 21.5 oz/sqy
Pile weight of wear layer 10.9 oz/sqy
Pile height 0.11 in
Surface pile density 0.0739 oz/in³
Total weight 103.3 oz/sqy
Total Thickness 0.27 in
Primary backing No woven
Backing 100% recycled PVC
Tile size 19.68x19.68in
Tiles per box 20 = 5.97 sqy

TECHNICAL PERFORMANCES

Dimensional stability ≤ 0,10%
Reaction to fire Bfls1
Impact sound reduction ΔL (w) 24 dB
Sound absorption α_w = 0,15 (H)
Electrostatic properties ≤ 2,0kV RT ~ 10¹⁰Ω
Thermal resistance 0,09m² K/W
Light fastness 7/8
Castor chair R≥2,4
European classification 33


INSTALLATION



Classification

Luxury class


33 (4)	32 (3)	31 (2+)	LC1	LC2	LC3	LC4	LC5	
heavy	general	moderate	simple	good	high	luxurious	prestige	



Description
Backing System
Vinyl Backing reinforced with
glass fibre / 100% recycled PVC backing



Description - Loop pile / Bouclé
100% Polyamide
Teint masse / Solution dyed

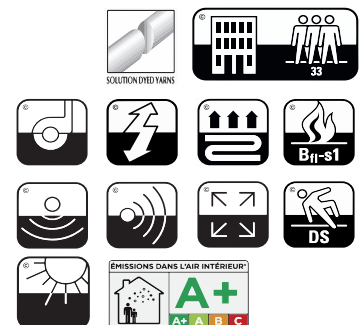

SITE CERTIFIÉ

Répond à la démarche

HQE LEED

