

## **Neoflex Surge Series.**

Neoflex<sup>™</sup> Surge Series is a 100% EPDM rubber floor covering made of polymerically bound synthetic rubber, which incorporates an advanced polyurethane coating technology.

Designed for use in indoor commercial settings, it exhibits excellent physical properties of EPDM rubber floors such as user comfort, flexibility, durability, sound insulation and step noise reduction.

Neoflex Rubber Flooring is globally recognized as a superior product of an ISO 9001 & ISO 14001 certified manufacturer of rubber flooring for 33 years.



## THE SALT MANAGEMENT

Madel Kaulture augumente a Augumente aug

Contraction of the second s

A STATE OF THE STA

-

Instanting of the

A State of the sta

Aubrill Andrewski and Aubrill

Bill dit. Tat.

**Color** 488 MV15 MV16

Thickness 2.5 mm




# **Inspired by Nature.**

Inspired by wave motion, a disturbance by stress or strain from equilibrium, a directional displacement over time.

Neoflex Surge Series showcases exquisite color combinations across its 44 colorways, giving the floor a strong presence that is at once both dramatic, yet reassuring.



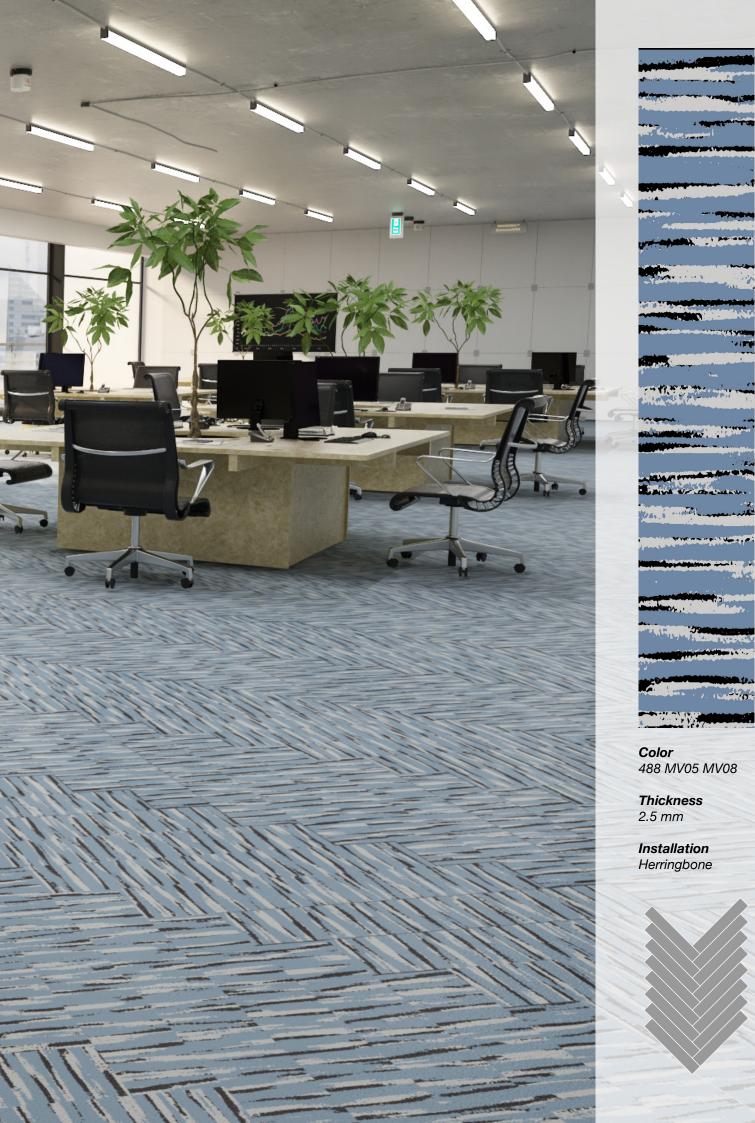

-بر الدر



**Color** 488 MV16 MV18


**Thickness** 6 mm









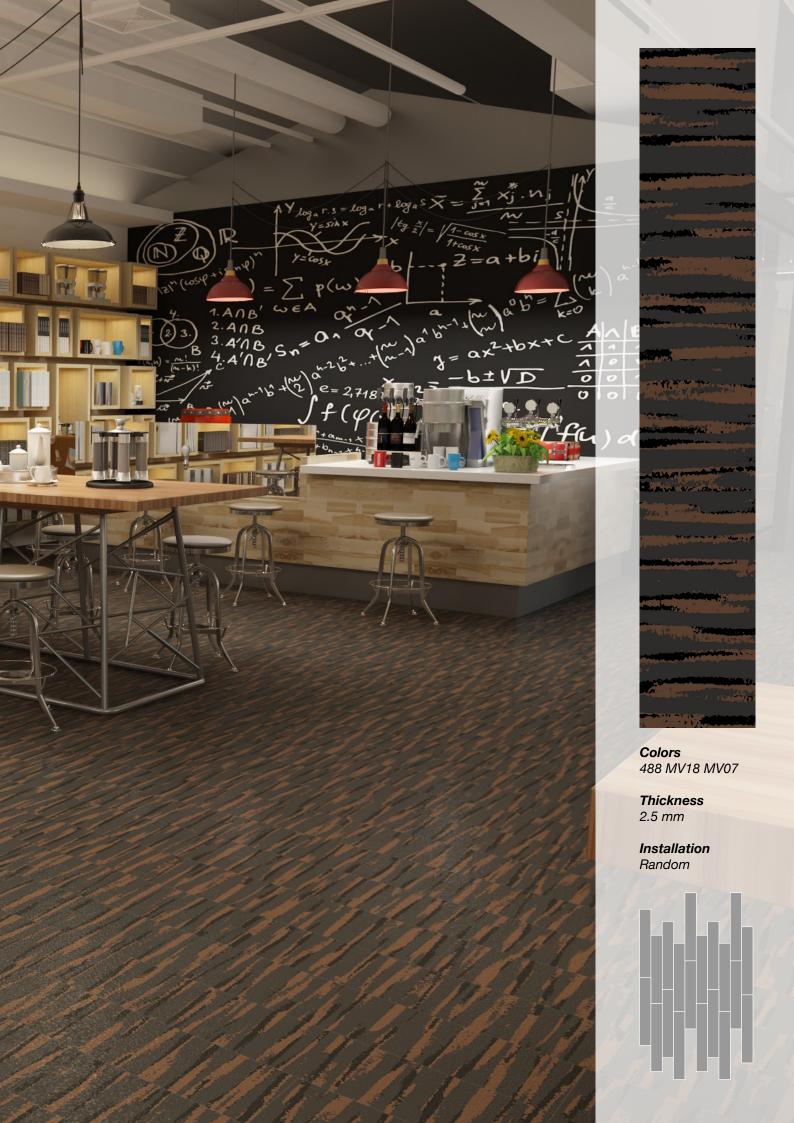







الملا



## Fit for Purpose.

Neoflex Surge Series is purpose-built to be durable, comfortable, slip and indent resistant, as well functional.

It does not dent or crack when subjected to impacts and at the same time reduces ambient noise, step noise, reverberation, noise transfer and vibration transfer creating a pleasant and restful environment.



#### an samp site and

Sector of the se

**Color** 488 MV23 MV07

Thickness 6 mm





## In A Unique Format.


Neoflex Surge Series is supplied in 1200 mm x 200 mm modular planks.


With five unique planks, designed to be laid at random, a truely sophisticated floor can be created that avoids repetition.

1200 mm

200 mm



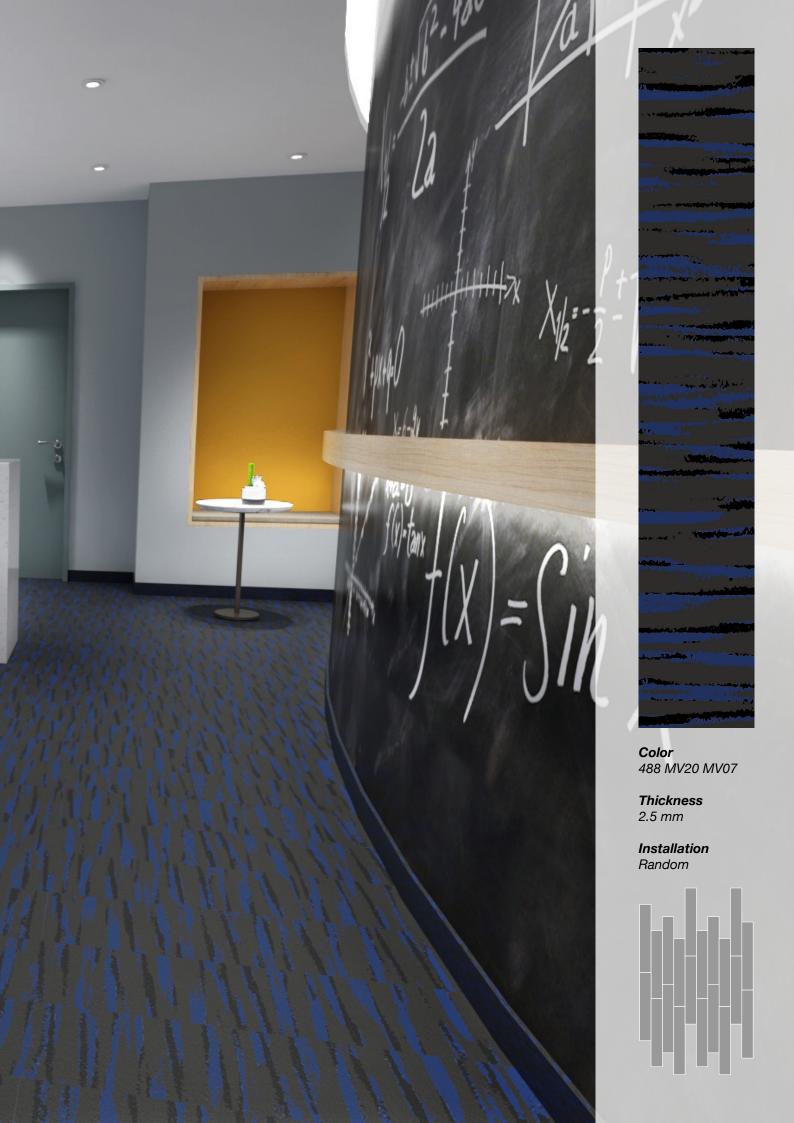

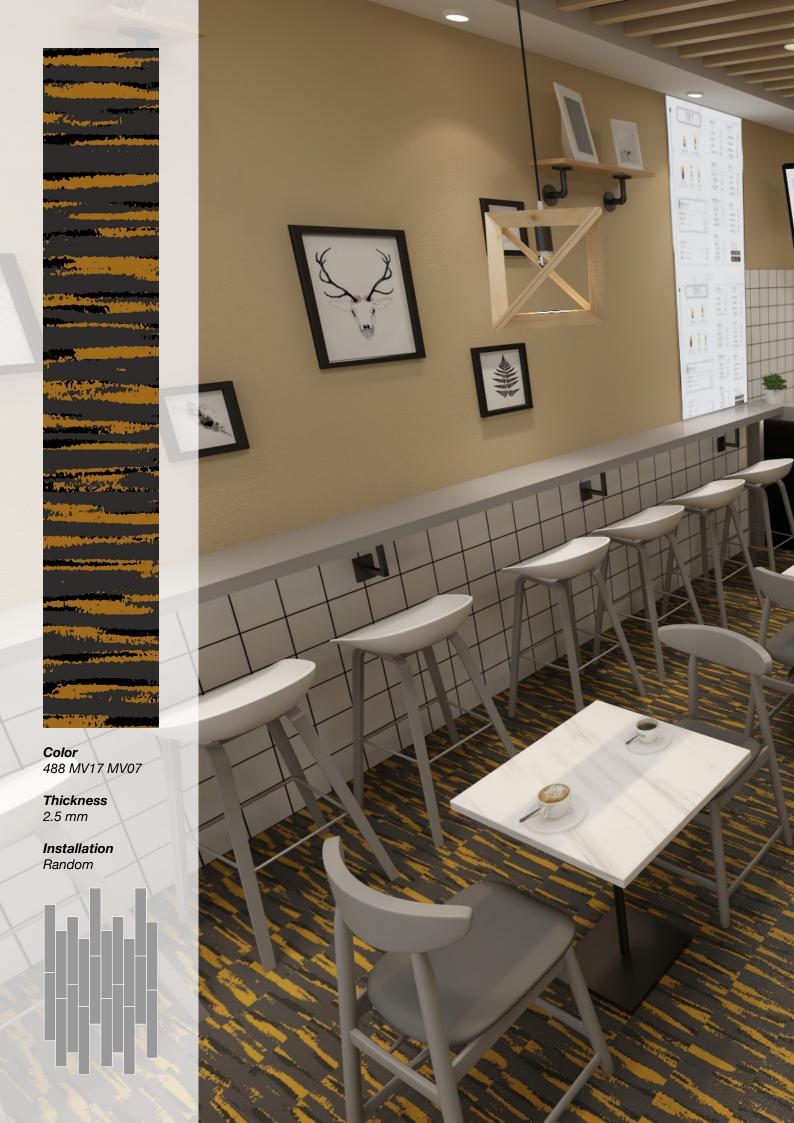














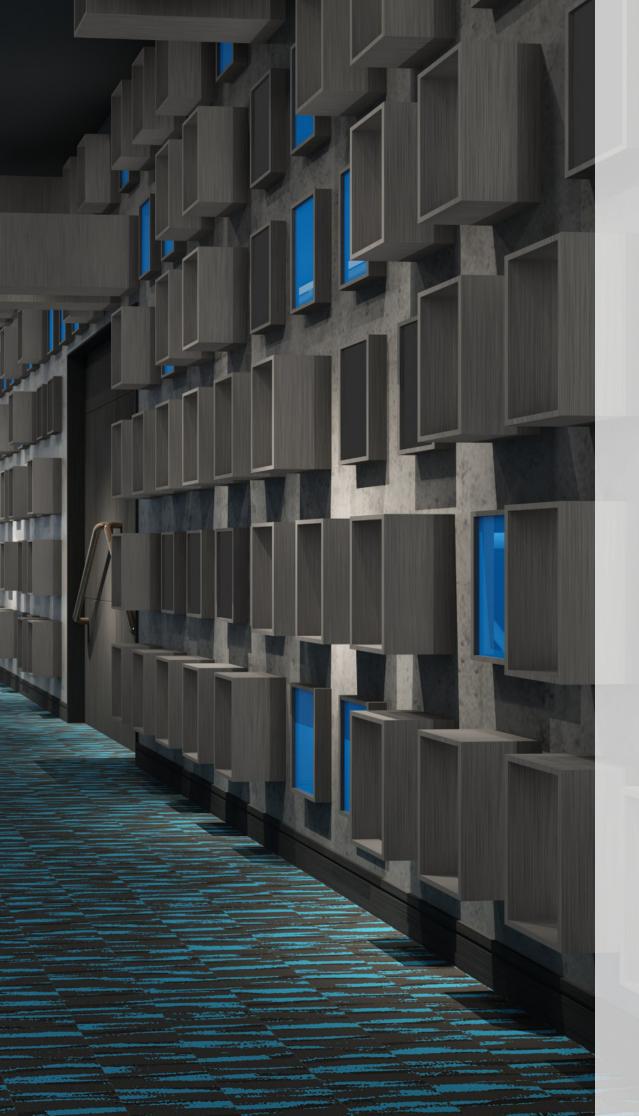

CONCERCIPTE OF CONCERCIPTE
a de la constat de ser de la constat de ser de la constat de la constat de la constat de la constat de la const
and t
and the second
Change
and the second sec
and a stand of the stand of the stand
N. M.
A LEW MANY ADDRESS
Variation and the second s
and the second s
and the second sec
- The second second second
and the second second second
and the second of the second
A CONTRACTOR OF A CONTRACTOR O
a dia mandra di seconda
22.2
A MAN
THE REAL PROPERTY
and the state of the
1
North Contraction of the second
المراجعة والمحمد مستهمين
CERTARNA C.
- Arthological - Incomence
and the second sec
and the second second second
All and the state of the second
THE REAL PROPERTY.
Color


488 MV09 MV07


Thickness 2.5 mm



**Color** 488 MV06 MV07

**Thickness** 6 mm



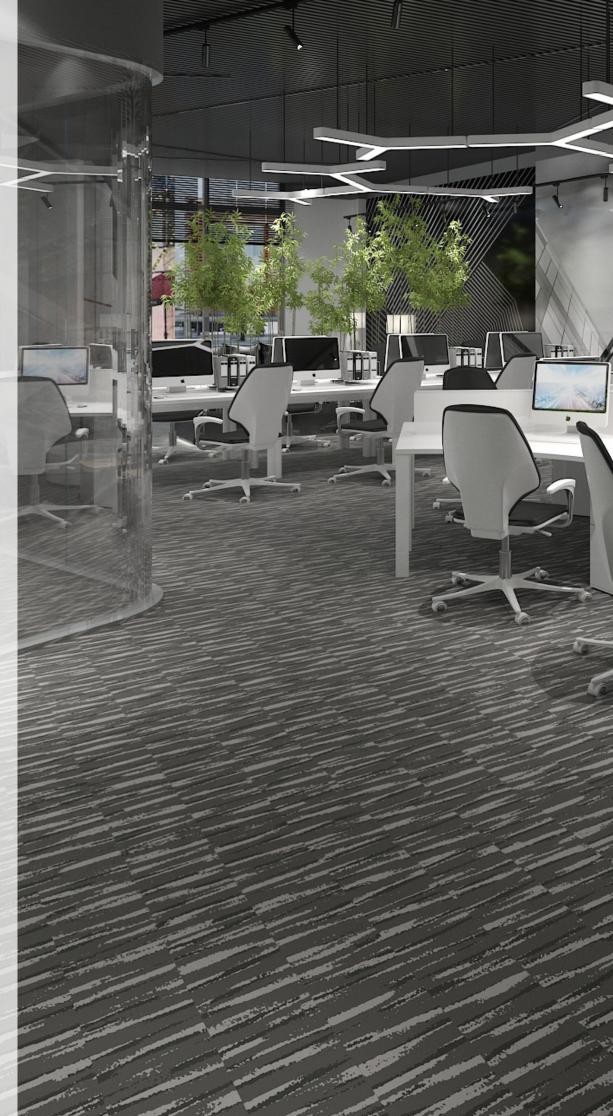









and a second sec

Allowers and a state

-

**Color** 488 MV15 MV05


Thickness 6 mm









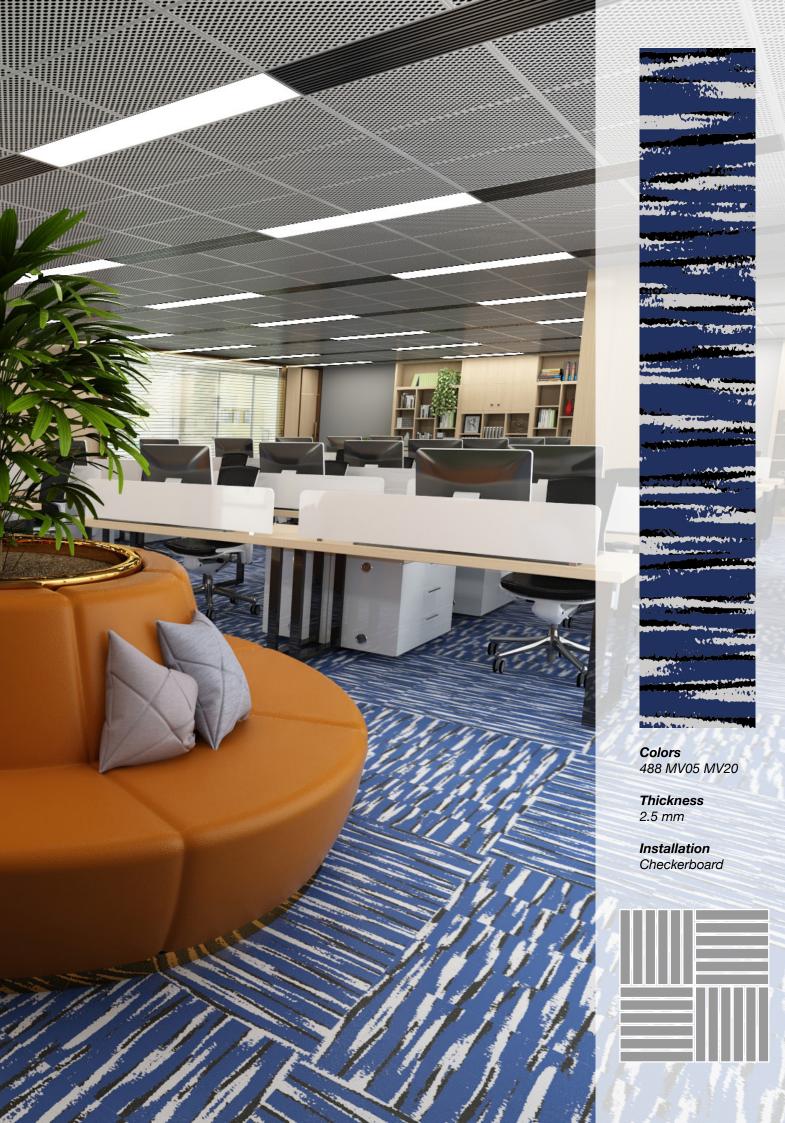

# **Standard Colors.**

Neoflex Surge Series is available in a wide variety of standard colorways that utilize two pattern colors printed over a black EPDM rubber base.

The below color swatches are meant to give you a first impression of colors and materials. Experience has shown, however, that printed versions of colors cannot in all cases faithfully reproduce the color appearance of the originals. We therefore recommend that you consult your Neoflex partner on your preferred color choices, who will be happy to show you original samples and assist you.



488 MV01 MV18



488 MV05 MV07



488 MV05 MV20

488 MV02 MV04



488 MV05 MV08



488 MV06 MV04




488 MV04 MV07



488 MV05 MV09



488 MV06 MV07





488 MV05 MV19



488 MV06 MV18



#### 488 MV06 MV20




#### 488 MV08 MV20




#### 488 MV13 MV07



488 MV15 MV07



#### 488 MV08 MV06




#### 488 MV09 MV07




#### 488 MV13 MV18



488 MV15 MV16



#### 488 MV08 MV07



#### 488 MV10 MV07

Martin Carlos Carlos Carlos
<u>Diskin en uni di Disker</u>

#### 488 MV15 MV05



488 MV15 MV17



#### 488 MV08 MV19

488 MV10 MV11

Carlos and the second s
Provide and a second second

## 3.4 **1**

#### 488 MV15 MV06

and a second
The state of the second states

488 MV15 MV18



#### 488 MV16 MV06



#### 488 MV16 MV17



#### 488 MV17 MV18



488 MV22 MV07




#### 488 MV16 MV07




#### 488 MV16 MV18



#### 488 MV18 MV07



#### 488 MV23 MV07




#### 488 MV16 MV10



#### 488 MV16 MV20



#### 488 MV19 MV07



488 MV23 MV20



#### 488 SH16 MV11



#### 488 MV17 MV07



#### 488 MV20 MV07

and a set of the set o
C. R. Stalling of the state of the state of the
All the advertises of a second

488 MV26 MV07


# Installation Options.

Neoflex Surge Series Flooring can be installed in a variety of different ways. Different colors can be combined to great effect.


2-Color Random


2-Color Random

# Random

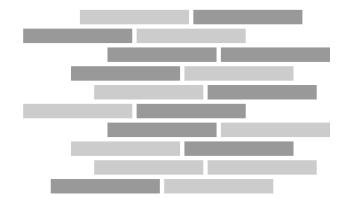


# 2-Color Random







## **3-Color Random**




Herringbone



## 2-Color Herringbone




## 2-Color Herringbone



## Checkerboard



#### 2-Color Checkerboard



## 2-Color Checkerboard



### 2-Color Checkerboard



# **Technical Specifications.**

Neoflex Surge Series is made of 100% synthetic EPDM rubber with a life expectancy of 10+ years backed by a 7-year limited warranty.

Property	Standard	Result
Thickness		2.5 mm, 6 mm
Dimensions		1200 mm x 200 mm
Weight		± 4.65 kg/sqm
Hardness	ISO 7619-1:2010	62.1° Shore A
Determination of Flexibility & Deflection	ISO 24344:2012	No cracking in either direction
Enhanced Slip Resistance	EN 13845:2005 Annex C	Moderate
Dynamic Coefficient of Friction	EN 13893:2012	0.7
Light Fastness	ISO 105-B02:2013	7-8 Grade
Residual Indentation	ISO 24343-1:2002	0.18 mm
Dimensional Stability	ISO 23999:2012	0.5%
Flammability	EN 13501-1	Efl (Optional Cfl-s1)
Installation		Stikibak™ or Full-Bond


# **Standard Thicknesses.**

Neoflex Surge Series is manufactured in 2 thicknesses, each designed to be used for different fitness flooring applications.

All thicknesses utilize a 2.5mm EDPM top layer. 6mm thickness consists of a 2.5mm EPDM layer laminated to a recycled SBR rubber underlay.

	C	
	6 mm	
2.5mm		

If thicker product is required, rubber underlay can be supplied in rolls, and Neoflex Surge Series can be adhered on top.

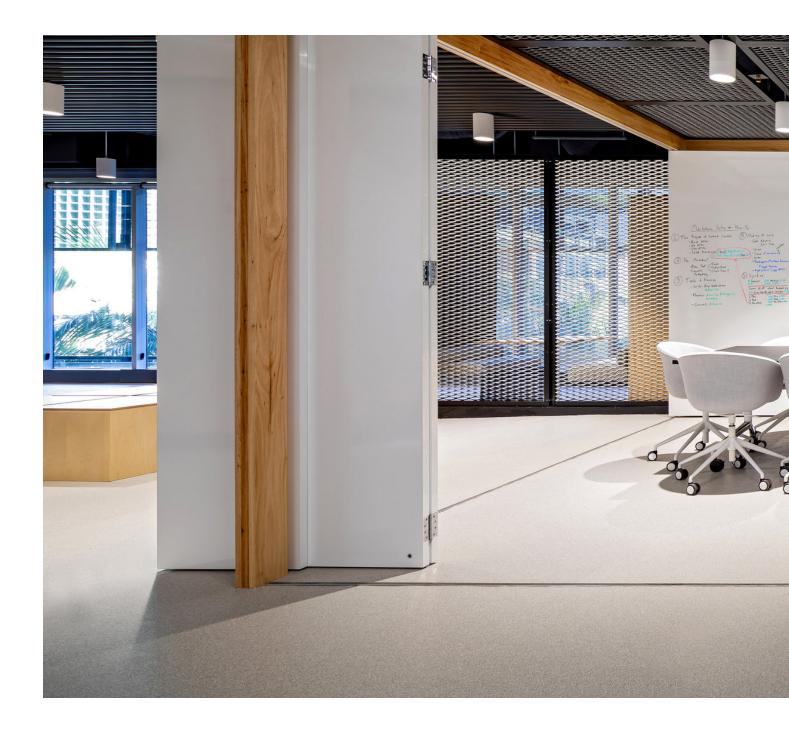



# **Limitless Potential.**

Combining great ideas, cutting edge design, and an eye for functionality, Rephouse manufactures rubber flooring products in many varieties other than Neoflex Interweave Series.

Rephouse manufacturers a complete range of commercial rubber flooring solutions. To find out more about these floors, contact your Neoflex partner who will be happy to advise.

Also, visit our website, or join us on social media, for the latest updates.



www.rephouse.com



info@rephouse.com





12 Years ...... and the state of t 5.7 34 A CONTRACT OF ----And were a think has not ----The second second second and a state of the Marke 4,970 103(1) States and the second of the and the second second ( ( Pig 111111 China water in the start prover 1. M. 1. M. A THE AND 1 serie id ali Hart ANIA CONTRACTOR CONTRACTOR Next Cont NORWOW N.C. The Strange P. Anna Chine was and approved a provide a start of the parties ..... A State Production The second second be for the second second second -1 1 1 U.S. Warren and S. C. 25 1.1.2.1 T SC'S in the state of the second state of the second state REPHOUSE the second second second