



Interweave



VOXFLO®

Technical Specifications

Style Name	Interweave
Construction	Multi-Level Loop
Fiber	Voxflor certified Nylon
Gauge	1/12"
Stitches	10 per inch
Pile Weight	25 OZ/yd ²
Average Pile Height	4 mm±0.5 mm
Backing	PVC with fiberglass
Tile Size	25cm*100cm
Area of use	Commercial - General Duty
Anti-microbial	Health Guard (Available)
Installation Method	

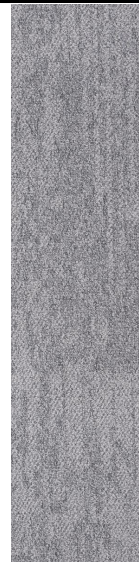

Herringbone Ashlar Brick

Performance Specifications

	Test Code	Standard	Test Results	
Flammability Tests				
Radiant Panel	ASTM E 648		Class I	Pass
Methenamine Pill	ASTM D2859		8	Pass
Smoke Density	ASTM E 662		≤ 450	Pass
Stability				
Delamination	ASTM D3936	≥ 3.0 lbc/in		
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%	Pass
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs	
Anti-Static				
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV	Pass
Colour Fastness				
Light	AATCC 16 E	≥ 4-5	4-5	Pass
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5	Pass
Wear Tests				
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8	Pass
Hexapod Drum	ASTM D5252	≥ 3-4	3.0	
Generic Tests				
Green Carpet(VOC)	GLP 6331#/6330#		Accredited	
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	0.15	



NOTE: All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

