



DATA SHEET

Parking

issue 08/18 pg1/2

Carpet Tiles

Distributor/Manufacturer

Advance Flooring Systems Limited/Voxflor

Trade Name

Parking

Product Description

Solution Dyed Econyl 100% Regenerated Nylon

Product Benefit

Long lasting tufted carpet tile designed for flexibility, ease of installation and easy to clean.

Area of Application

Parking is suitable for use in any high traffic commercial areas.

Composition

Parking carpet tiles are made with a multi-level-loop tufted construction consisting of 100% Econyl solution dyed fibre, bonded to a fiberglass reinforced PVC backing system.

Dimensions

Pile height	4mm \pm 0.5mm at 20 OZ/yd ²
Tile size	500 x 500mm

Pattern & Colours

Multi-level-loop tufted solid pattern available in a range of 30 colours

Manufacture

Parking is manufactured in China, by Voxflor using a manufacturing process that is ISO 14001:2004 compliant for its Environmental Management Systems.

Smoke/Fire

Parking carpet tiles have been tested and comply by exceeding the NZ requirements

Electrical Resistance

Parking carpet tiles have been tested and comply by exceeding the NZ requirements

Durability

Commercial – Heavy Duty

Advance Flooring Systems Ltd
email: info@advanceflooringsystems.com
www.advanceflooringsystems.com

Call us: **0508 238 262**


Advance
FLOORING SYSTEMS



DATA SHEET

Parking

issue 08/18 pg 2/2

Carpet Tiles

Sound Absorption

Voxflor carpet tiles can reduce reverberative noise in a commercial office environment.

UV Resistance

Some fading may be observed in areas of intense sunlight.


Sustainability

Voxflor is committed to the protection of the environment and all products are manufactured to strict ISO 14001: 2004 standards.

Installation

Parking carpet tiles must be installed by a competent and experienced carpet installer and we recommend the full stick method - more information on the recommended installation procedures is available on our website www.advanceflooringsystems.com or upon request.

We recommend the following installation method for Parking.

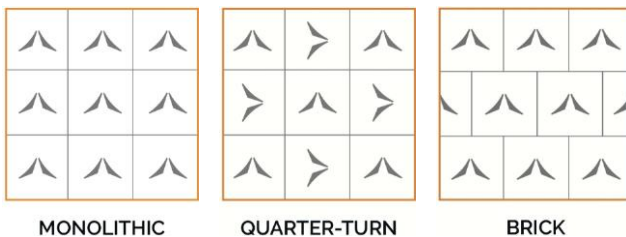

Recommended Adhesives

Strongbond 65 – Look Floors, Polymer 999 PS – Gilt Edge Industries and Mapei Ultrabond Eco Fix.

Cleaning and Maintenance

Proper maintenance is one of the most important factors to ensure good performance of carpet. When possible, Parking should be vacuumed daily. In the first instance, a good entrance matting system installed at entry areas will help collect up to 90% soiling before it is tracked into the interior of the building - more information on the recommended maintenance procedures is available on our website www.advanceflooringsystems.com or upon request.

Warranty

The manufacturer guarantees the product for ten (10) years for wear resistance, delamination and dimensional stability. Parking has a lifetime stain, soil and antistatic limited warranty and a 25-year fade resistance, abrasive wear limited warranty and a 15-year castor chair limited warranty.