



ACCESS - NETWORK COLLECTION

Technical Specifications

Construction: Multi-level Loop

Fiber: Voxflor® Certified Nylon

Gauge: 1/10"

Stitches: 8 per inch

Area per carton: 6m²

Traffic Classification: Commercial - Heavy Duty

Average Pile Height: 4.0 ± 0.5 mm

Standard Backing: EcoAce-Bac®

Tile Size: 25 x 100 cm


Pile Weight: 22 OZ/yd²

Total Thickness: 7.5 ± 0.5 mm


Piece per carton: 24 pieces

Anti-microbial: Ultra Fresh (Available)

Installation Methods



Ashlar



Herringbone

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications



Declare.



Certificate Of Declare

[DOWNLOAD](#)

Certificate Of EPD

[DOWNLOAD](#)

Certificate Of CRI

[DOWNLOAD](#)

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥45 watt/cm ²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
Generic Tests			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

Warranty

15-year Commercial Limited Warranty

[DOWNLOAD](#)

Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.


Additional Files

Installation Guidelines

[DOWNLOAD](#)

Maintenance Guidelines

[DOWNLOAD](#)

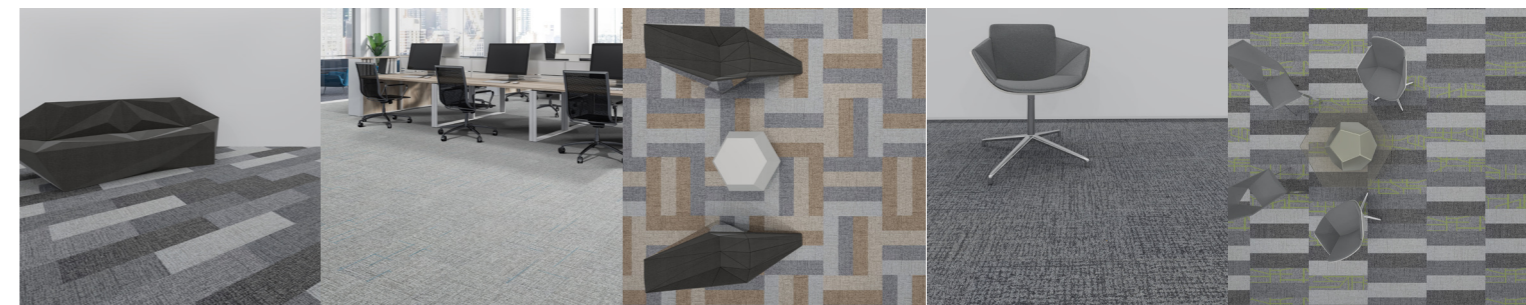



Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥45 watt/cm ²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
Generic Tests			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

CONNECTION - NETWORK COLLECTION

Technical Specifications

Construction: Multi-level Loop

Fiber: Voxflor® Certified Nylon

Gauge: 1/10"

Stitches: 8 per inch

Area per carton: 6m²

Traffic Classification: Commercial - Heavy Duty

Average Pile Height: 4.0 ± 0.5 mm

Standard Backing: EcoAce-Bac®

Tile Size: 25 x 100 cm


Pile Weight: 23 OZ/yd²

Total Thickness: 7.5 ± 0.5 mm


Piece per carton: 24 pieces

Anti-microbial: Ultra Fresh (Available)

Installation Methods



Ashlar



Herringbone

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Warranty

15-year Commercial Limited Warranty

[DOWNLOAD](#)

Additional Information

- VOXFLORE uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.


Additional Files

Installation Guidelines

[DOWNLOAD](#)

Maintenance Guidelines

[DOWNLOAD](#)

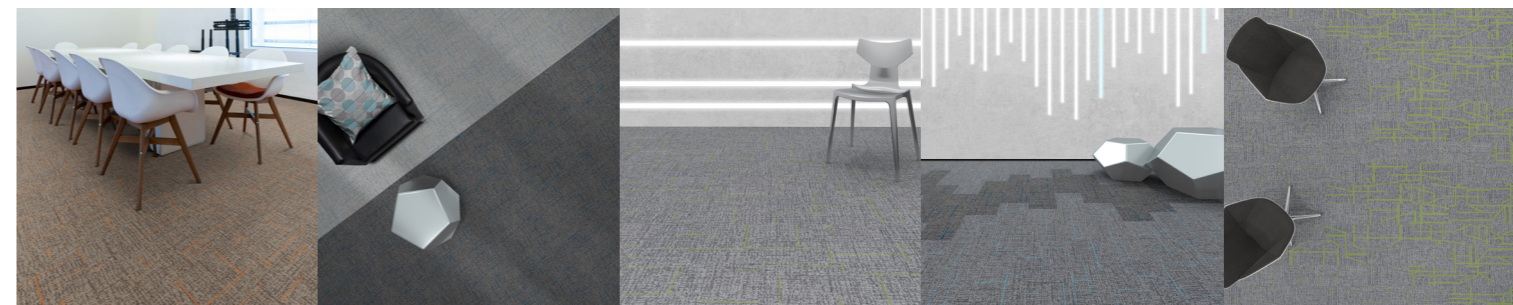

Certifications



ISO 4001:2018



ISO 9001:2008



ISO 14001:2004



CERTIFIED ENVIRONMENTAL PRODUCT DECLARATION



GLP No. :100231

Declare.



LIVING BUILDING CHALLENGE



Certificate Of Declare


[DOWNLOAD](#)

Certificate Of EPD

[DOWNLOAD](#)

Certificate Of CRI

[DOWNLOAD](#)

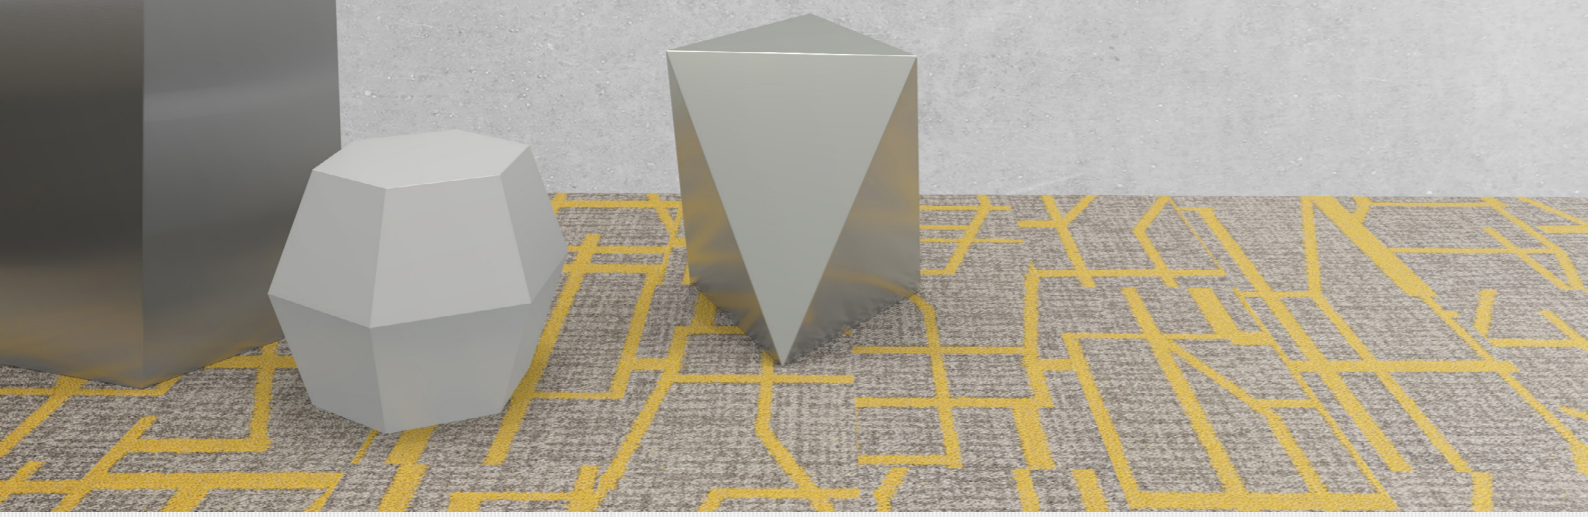


ROUTE - NETWORK COLLECTION

Technical Specifications

Construction: Multi-level Loop	Standard Backing: EcoAce-Bac®
Fiber: Voxflor® Certified Nylon	Tile Size: 25 x 100 cm
Gauge: 1/10"	Pile Weight: 24 OZ/yd ²
Stitches: 8 per inch	Total Thickness: 7.5 ± 0.5 mm
Area per carton: 6m ²	Piece per carton: 24 pieces
Traffic Classification: Commercial - Heavy Duty	Anti-microbial: Ultra Fresh (Available)
Average Pile Height: 4.0 ± 0.5 mm	

Installation Methods

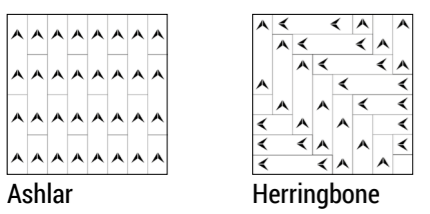

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications



Declare.

Certificate Of Declare

[DOWNLOAD](#)



LIVING BUILDING CHALLENGE



CE

Certificate Of EPD

[DOWNLOAD](#)



WELL

Certificate Of CRI

[DOWNLOAD](#)



LEED

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥45 watt/cm ²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4-5	4-5
Rubbing/Crocking	AATCC 165	≥ 4-5	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 3-4	3
Generic Tests			
Nylon Carpet with EcoAce-Bac®	GLP No. : 100231		Accredited
Acoustic-Nylon	BS EN ISO 354	Absorption Coefficient-NRC	aw =0.15(H)

Warranty

15-year Commercial Limited Warranty [DOWNLOAD](#)

Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

Additional Files

Installation Guidelines

[DOWNLOAD](#)

Maintenance Guidelines

[DOWNLOAD](#)

